


GRU DALBE HS 380 Marilyn

36 m - 1000 kg
32 m - 1250 kg

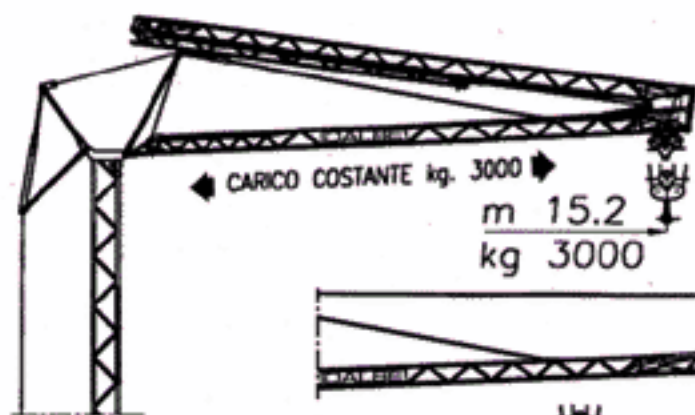

HYDRAULIC ACTION


m 11.8
kg 4000

m 28.4
kg 1450

m	11.8	12.6	13.6	15.1	16.5	18.3	19.7	21.4	23.5	24.7	26	28.4
kg	4000	3700	3400	3000	2700	2400	2200	2000	1800	1700	1600	1450

INTERMEDIATE

HYDRAULIC ACTION

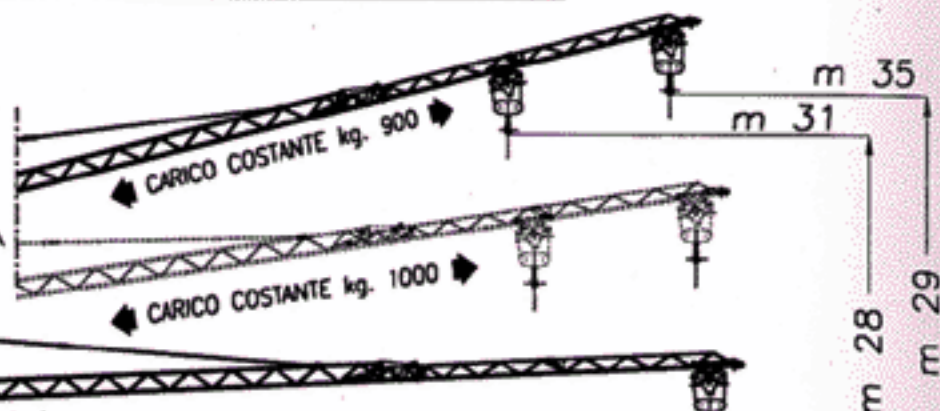

m 11
kg 4000
m 20
kg 2000

m 36
kg 1000

m	11	11.7	12.6	14	15.4	17	18.3	20	21.8	24.1	27.1	28.8	29.8	33.2	36
kg	4000	3700	3400	3000	2700	2400	2200	2000	1800	1600	1400	1300	1250	1100	1000



m 11.7
kg 4000

m 21.3
kg 2000

m 32
kg 1250

m	11.7	12.6	13.5	15	16.5	18.2	19.6	21.3	23.4	25.9	27.4	31	32
kg	4000	3700	3400	3000	2700	2400	2200	2000	1800	1600	1500	1300	1250

ZAVORRA DI LAVORO 20 t
15 x 1,35 t

ZAVORRA FISSA
4,2 t

R=2,2 m.

m 4.3


ASD2

m 3.2


m 4x4 m 4x4

tot 36,5 t
F max 22 t

SBRACCI, PORTATE, REAZIONI - RADIUS, CAPACITY, REACTIONS - CURVAS DE CARGAS

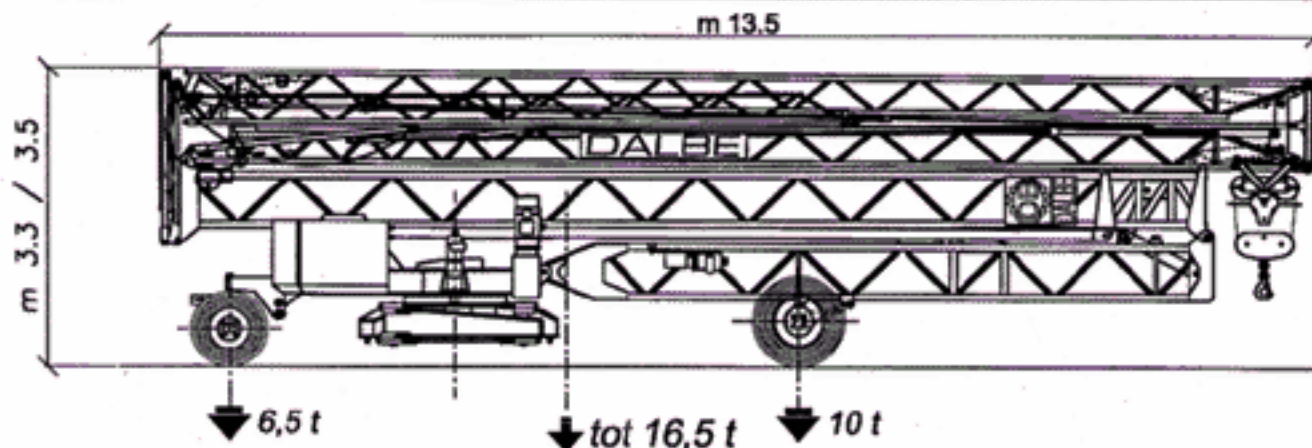

SISTEMA DI LIVELLAMENTO PER TRASPORTO SU CAMION
LEVELLING DEVICE FOR TRUCK TRANSPORT
SISTEMA DE NIVELACION PARA TRANSPORTE

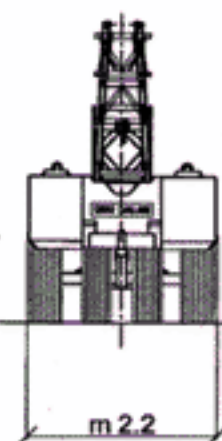

TRASPORTO - TRANSPORT - TRANSPORTE

DIN 15018 - H1-B2/B3 - 15019 - 18800



2000/14/CE



ASD2 system